

# FISHER & PAYKEL

## DATA SHEET 36" CoolDrawer™

Model no:  
**RB36S25MKIW1**  
(refer page 3 for metric measurements)


Product Dimensions	in
Ⓐ Overall height* of CoolDrawer™**	25 3/16"
Ⓑ Overall width* of CoolDrawer™	33 11/16"
Ⓒ Depth of CoolDrawer™ chassis (includes power terminal)	21 15/16"
Ⓓ Height from bottom datum to bottom of drawer front*	6 1/16" - 7 1/4"
Ⓔ Height from bottom datum to top of drawer front*	25"
Ⓕ Width of internal drawer front*	31 11/16"
Ⓖ Depth of internal drawer front*	1 3/4"
Ⓗ Depth of drawer (open) measured from front datum*	20 1/2"

\* Does not include the custom door panel or handle to be manufactured and fitted by cabinetmaker

NOTE: Height of custom panel drawer and false panels can vary depending on door positioning and adjustment

Minimum Clearances	in
Minimum inside height of cavity from bottom datum**	26 3/16"
Minimum inside width of cabinetry	34"
Minimum inside depth of cavity from front datum	22 1/16"
Minimum gap between drawer panel to top of custom false panel	3/16"
Minimum height of toe kick	2 15/16"

\* Minimum internal height of cabinetry can be 25 3/16" if outlet duct is not used. Refer to installation guide for details

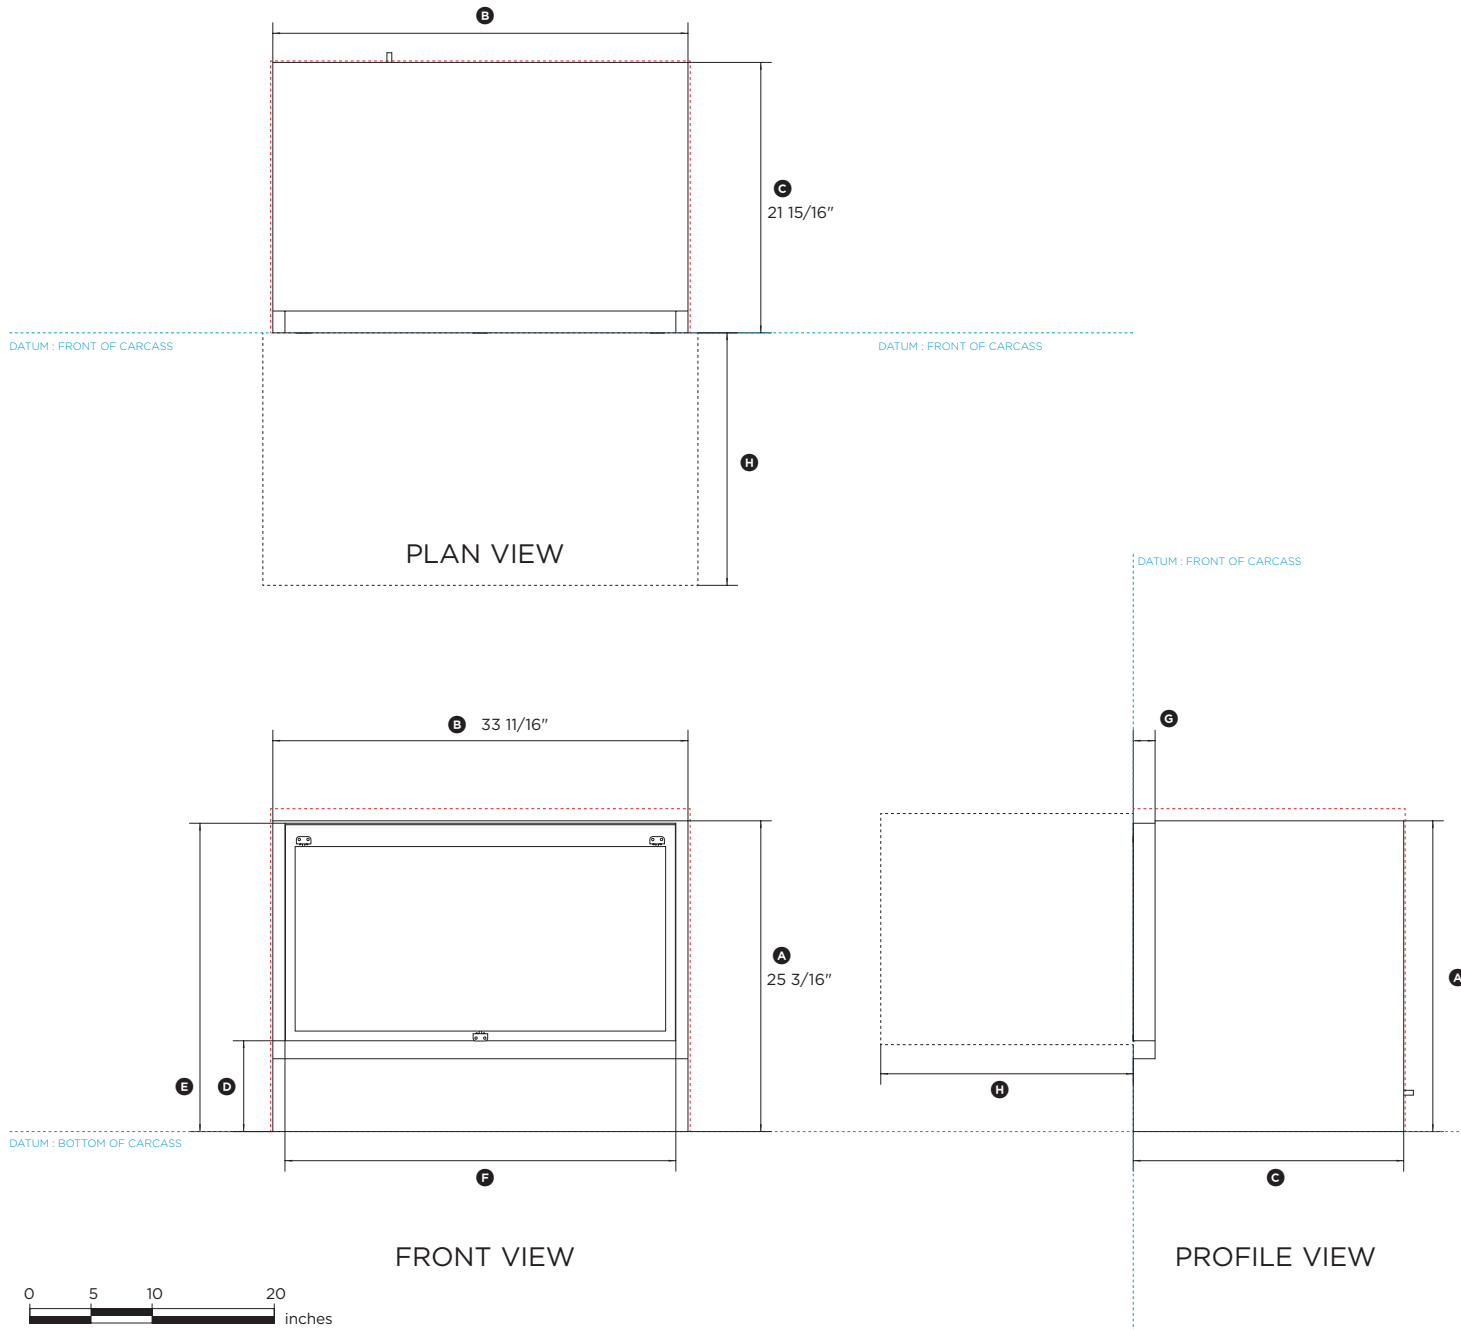

INDICATES PRODUCT DATUM -----  
INDICATES CABINETY CLEARANCES - - - - -

DATE: **01.06.2018**

IMPORTANT: Throughout this guide, dimensions may vary by  $\pm 2\text{mm}$  (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit [fisherpaykel.com](http://fisherpaykel.com)